



▣ VALVE

- ▷ Working Pressure : 10kg/cm²
- ▷ Max Temperature : 80℃
- ▷ Ball : Full bore
- ▷ Material : JIS G5121 - SCS13
JIS G5121 - SCS14
- ▷ End connection : RF FLANGE
- ▷ ISO5211 Direct mounting pad
- ▷ Investment casting body & end cap

▣ OPTION


- ▷ Fire safe design

▣ ACTUATOR

- ▷ Double Acting
- ▷ Spring Return

▣ Accessories :

- ▷ Solenoid valve with Neon lamp(IP65)
- ▷ Limit switch box(Weather, Explosion proof)
- ▷ Air Filter regulator unit
- ▷ Speed controller
- ▷ Silencer
- ▷ One touch fitting

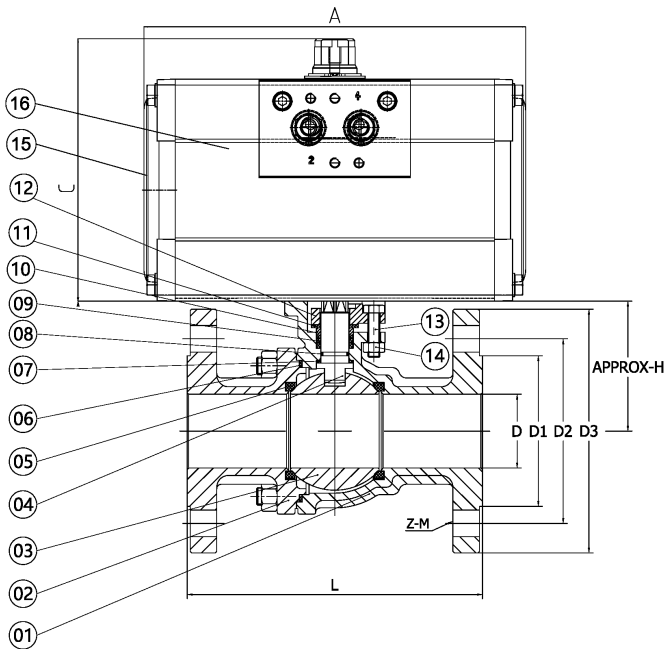

NO	PARTS NAME	METERIAL
1	BODY	SCS13/SCS14
2	CAP	SCS13/SCS14
3	BALL	SCS13/SCS14
4	STEM	SUS304/SUS316
5	SEAT	RPTFE
6	GASKET	RPTFE
7	THRUST WASHER	RPTFE
8	STEM O-RING	VITON
9	PACKING	RPTFE
10	METAL RING	SCS13
11	BELLEVILLE WASHER	SCS13
12	GLAND	SCS13
13	BOLT	SUS304
14	NUT	SUS304
15	CAP	COATED DIE-CAST ALUMINIUM
16	ACTUATOR BODY	ALUMINUM ALLOY

Valve size	D	L	H	C	A	D1	D2	D3	Z - M
15A	15	108	48	100	133.3	51	70	95	4-15
20A	20	117	62	100	133.3	56	75	100	4-15
25A	25	127	64	100	133.3	67	90	125	4-19
32A	32	140	71	112	151.4	76	100	135	4-19
40A	38	165	76	112	151.4	81	105	140	4-19
50A	50	178	84.5	112	151.4	92	120	154	4-19
65A	64	190	106.8	143	213.7	105	140	175	4-19