




■ FEATURES

- ▷ Working Pressure : 10kg/cm<sup>2</sup>
- ▷ Max Temperature : 80 °C
- ▷ Material : JIS G5121 – SSC13  
JIS G5121 – SSC14  
ASTM A351-CF8  
ASTM A351-CF8M
- ▷ TYPE : S.B
- ▷ End connection :  
\* Screwed : BS21 1973(BSPT)  
ANSI B2.1(NPT)

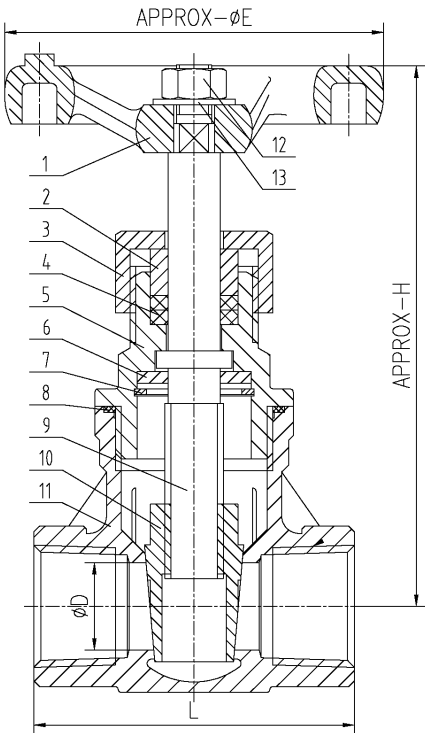

SIZE	D	L	H	E
15A	15	56	99	65
20A	20	60.3	106	65
25A	25	65	110	72
32A	32	72	128	80
40A	40	78	147	96
50A	48	89	164	96

NO	PARTS NAME	MATERIAL
1	HANDWHEEL	QT400
2	GLAND PACKING	SUS304
3	GLAND NUT	SSC13/SSC14
4	PACKING	PTFE
5	BONNET	SSC13/SSC14
6	STEM FRAME	SUS304
7	RING	SUS304
8	GASKET	PTFE
9	STEM	SUS304/SUS316
10	DISC	SSC13/SSC14
11	BODY	SSC13/SSC14
12	NUT	SUS304
13	WASHER	SUS304

품질향상을 위하여 사전 예고없이 사양이 변경 될 수 있습니다.