




■ FEATURES

- ▷ Working Pressure : 5kg/cm²
- ▷ Max Temperature : 80°C
- ▷ Ball : Full bore
- ▷ Material : ASTM A351 - CF8(1.4308)
ASTM A351 - CF8M(1.4408)
- ▷ End connection : Ferrule(clamp)
- ▷ ISO5211 Direct mounting pad
- ▷ Investment casting body & end cap

■ OPTION

- ▷ Fire safe design

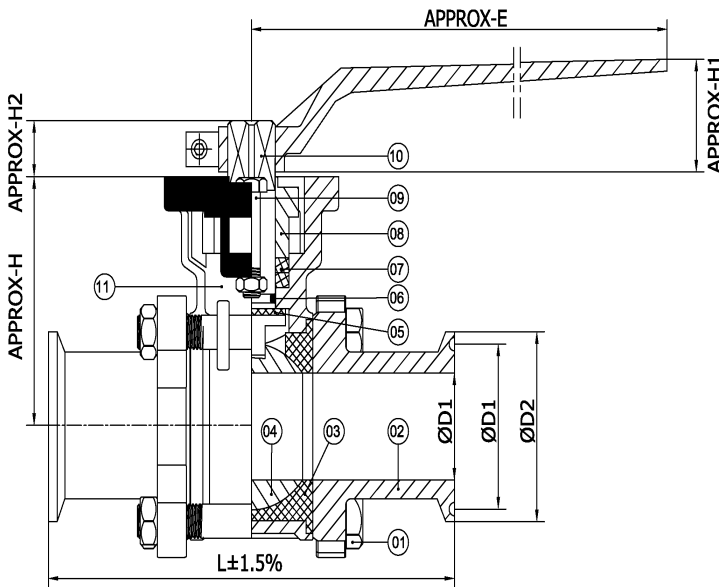

NO	PARTS NAME	MATERIAL
1	BLOT	SUS304
1	ELASTIC GASKET	SUS304
1	NUT	SUS304
2	END CAP	CF8/CF8M
3	SEAT	PTFE
4	BALL	SUS304/SUS316
5	THRUST WASHER	PTFE
6	O-RING	VITON
7	PACKING	PTFE
8	GIAND	CF8
9	BOLT	SUS304
9	NUT	SUS304
10	STEM	SUS304/SUS316
11	BODY	CF8/CF8M

SIZE		ISO-5211	D±0.5	L±1.5%	H	D1	D2	H1	H2	E
mm	INCH									
15	1/2"	F04-F05	15	96	48.6	43.6	50.4	40	9	143
25	1"	F04-F05	22.1	111	58.5	43.6	50.4	40	11	180
40	1-1/2"	F05-F07	34.8	141	76	43.6	50.4	45	14	224
50	2"	F05-F07	47.5	158	83.5	56.3	63.9	45	14	224
65	2-1/2"									
(금형 개선중)										
80	3"	F07-F10	72.9	201	118	83.3	90.9	50	17	290
100	4"	F07-F10	98	283	138	110.3	118.9	50	17	290

품질향상을 위하여 사전 예고없이 사양이 변경 될 수 있습니다.